




▶A++
▶A+

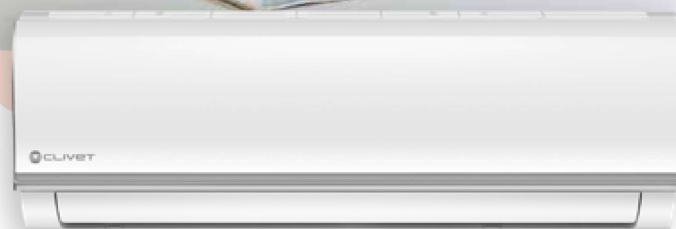

SINGLE Split / MULTI Split reversible heat pump with Hiwall indoor unit

WHY CHOOSE NATIV?

- ✓ Full range: SINGLE Split 9.000 ÷ 24.000 Btu/h, MULTI Split 9.000 ÷ 24.000 Btu/h
- ✓ SINGLE Split/MULTI Split compatible
- ✓ Optional: Wi-Fi for the remote management with NetHome Plus application for Android and iOS

COMFORT



12-grades indoor Fan speed



Anti-cold air Function



Temperature compensation

RELIABILITY



Self-diagnosis Function



Auto defrosting

CONVENIENCE



Single/Multi Compatible



Louver Position Memory



Auto Restart Function



Automatic correction of the connection error (Multi Split)

ENERGY SAVING



Sleep mode

HEALTH



High Density Filter



Cold Catalyst Filter

OPTIONAL



WIFI Control



Wi-Fi NWMX
(optional)



REMOTE CONTROL
RG10A-D-BGEF
(standard)



IZ2-XY

MULTI Split

technical data

Indoor unit			IZ2-XY	27M	35M	53M	70M
Codice articolo				89472260	89472262	89472261	89472263
Cooling capacity	Standard		Btu/h	9.000	12.000	18.000	24.000
			kW	2,6	3,5	5,3	7,0
Heating capacity	Standard		Btu/h	10.000	13.000	19.000	25.000
			kW	2,9	3,8	5,6	7,3
Dimensions	Unit	L x P x A	mm	805x194x285	805x194x285	957x213x302	1040x220x327
	Packaging	L x P x A	mm	870x270x365	870x270x365	1035x295x385	1120x405x315
Weight	Unit/Packaging		kg	7,5/9,7	7,5/9,7	10,0/13,0	12,3/15,8
Air filter	Type		-			CCF	
Airflow			m ³ /h	520/460/340	600/500/360	840/680/540	980/817/662
Sound power level			dB(A)	54	53	55	59
Sound pressure level			dB(A)	40/30/26/21	40/34/26/22	44/37/30/25	44,5/42/34,5/28
Operating range	Cooling	Indoor T.	°C			17 ~ 32	
	Heating	Indoor T.	°C			0 ~ 30	
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7	Φ9,52 - Φ15,9
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Control systems	Infrared remote control		-			RG10A4-D-BGEF	
	Settable temperature		°C			17 ~ 30	
Power supply	Voltage/Frequency/Phases		V/Hz/n°			230 / 50 / 1	

¹SEER and SCOP data, relative energy ratings and annual energy consumption in conformity to the EN 14825 standard measurement.

CCF = Cold Catalyst

Fan speed: HI=High; Mid=Medium; Lo=Low; SI=Silent

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

accessories

Standard

RG10A4-D-BGEF

Standard Wireless remote control fo indoor units CRISTALLO / ESSENTIAL 2 / NATIV

Optionals

Control systems

(learn more at Control System page)