

# Heatercooling

Available with EC fan


TECHNICAL PARAMETERS	HEATER cooling					
	CR2	CR3	CR2 MAX	CR3 MAX	CR4 MAX	
index AC	WA0017	WA0018	WA0024	WA0025	WA0026	
index EC	WA0017EC	WA0018EC	WA0024EC	WA0025EC	WA0026EC	
suggested heat output range*	kW	15-50	20-70	25-70	35-95	40-120
heat output (70/50°C) / ΔT air temperature increase**	kW/°C	26 kW 22°C	35 kW 34°C	40 kW 22°C	53 kW 35°C	68 kW 44°C
cooling output (7/12°C) / ΔT air temperature decrease ***	kW/°C	5,2 kW 5°C	8,1 kW 8°C	10,0 kW 7°C	12,7 kW 8°C	15,0kW 9°C
number of unit rows		2	3	2	3	3
air output - III speed	m3/h	3350	2950	5700	5600	5100
sound level at 5m distance - III speed	dB	60	60	59	58	58
diameter of connection nozzles	"	3/4	3/4	3/4	3/4	3/4
power supply parameters AC fan V/Hz 230/50	W/A	250/1,08	250/1,08	520/2,2	520/2,2	520/2,2
power supply parameters EC fan V/Hz 230/50	W/A	250/1,09	250/1,09	520/2,29	520/2,29	520/2,29

\* presented heat output for water agent temperature range 50/30°C - 120/90°C, air inlet temperature 0°C, III speed


\*\* for air inlet temperature 0°C

\*\*\* for air inlet temperature 25°C


## Unit sizes



CR2 | CR3



CR2 MAX | CR3 MAX | CR4 MAX

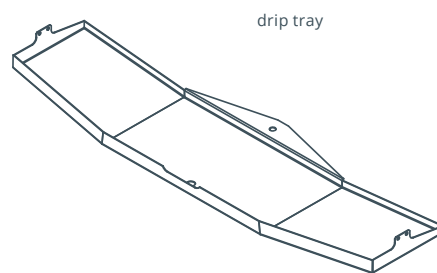

## Accessories



### Panel COMFORT (WAA0054N)





- Unique SONNIGER design
- Manual speed regulation
- Ventilation in the summer season
- for AC units



### Panel INTELLIGENT Wi-Fi (WAA0035W/EC)

- Control units from mobile app
- Automatic change of fan speed
- Compatible with BMS-MODBUS
- for AC and EC units

## Remote control



For condensing boilers, heat pumps and chillers.



effective cooling 2 - 15kW



effective heating 5 - 120 kW



remote control using mobile app



BEST PRICE